

INNOVATIVE DESIGN FRAMEWORK FOR T-BEAM AND SLAB BRIDGES INCORPORATING ARTIFICIAL INTELLIGENCE TECHNIQUES

RUDRADEEP DAS

ET19BPHDCE001

Enrollment No.

CIVIL ENGINEERING

Dr. ALOK GOYAL

SARDAR PATEL UNIVERSITY, BALAGHAT

DECLARATION: I AS AN AUTHOR OF THIS PAPER /ARTICLE, HERE BY DECLARE THAT THE PAPER SUBMITTED BY ME FOR PUBLICATION IN THE JOURNAL IS COMPLETELY MY OWN GENUINE PAPER. IF ANY ISSUE REGARDING COPYRIGHT/PATENT/ OTHER REAL AUTHOR ARISES, THE PUBLISHER WILL NOT BE LEGALLY RESPONSIBLE. IF ANY OF SUCH MATTERS OCCUR PUBLISHER MAY REMOVE MY CONTENT FROM THE JOURNAL WEBSITE. FOR THE REASON OF CONTENT AMENDMENT /OR ANY TECHNICAL ISSUE WITH NO VISIBILITY ON WEBSITE/UPDATES, I HAVE RESUBMITTED THIS PAPER FOR THE PUBLICATION. FOR ANY PUBLICATION MATTERS OR ANY INFORMATION INTENTIONALLY HIDDEN BY ME OR OTHERWISE, I SHALL BE LEGALLY RESPONSIBLE. (COMPLETE DECLARATION OF THE AUTHOR AT THE LAST PAGE OF THIS PAPER /ARTICLE.

Abstract

Bridges are vital components of transportation infrastructure, facilitating movement across various geographical barriers. Traditional methods of bridge design have relied on manual calculations, but with the advent of artificial intelligence (AI) techniques, there's an opportunity to transform bridge design, particularly for T-beam and slab bridges. This study explores the integration of AI, including machine learning algorithms and optimization techniques, to enhance the efficiency and sustainability of T-beam and slab bridge design processes. The literature review showcases the significance of AI in bridge design, followed by a detailed methodology involving finite element analysis (FEM) to compare conventional and AI-driven design approaches. Results indicate significant improvements in bending moments, shear forces, and deflections for T-beam configurations, highlighting the potential of AI in optimizing bridge design parameters.

Keywords: bridge design, artificial intelligence, T-beam bridges, slab bridges, finite element analysis, optimization.

1. INTRODUCTION

A bridge crosses a road, valley, or body of water without closing the route below. Every transportation system needs a bridge. Bridges of various sorts are used throughout. At 1871, Adair built the first reinforced concrete bridge, a 15-meter-span Waveney bridge at Homers Field, England. India is building more road bridges using reinforced concrete. T-beam bridges are often used for 10–25-m spans. Bridge design is difficult and demands creativity, practicality, safety, and economics. However, AI technology can transform bridge design, especially T-beam and slab bridges.

AI, including machine learning algorithms, neural networks, and optimization, offers a new bridge design strategy. Engineers may use AI to evaluate massive data sets, find complex patterns, and create optimized solutions that match performance standards. This novel design framework will improve T-beam and slab bridge design efficiency, accuracy, and sustainability. AI-based bridge design has great potential to solve infrastructure development problems. Highway and railway T-beam and slab bridges must be safe, durable, and cost-effective under various loading circumstances. Engineers can use AI-based design methods to analyze complicated datasets, simulate bridge behavior, and optimize designs for strict performance criteria.

2. LITERATURE REVIEW

Anushia K Ajay (2017) Infrastructure measures a nation's development. Infrastructure includes highways that carry people and goods. Teebeam bridges dominate highway bridges. Research around the world creates and reuses IRC codes. IRC 112-2011 replaces rules IRC 21-2000 and IRC 18-2000. Likewise, IRC 112-2011 adds limit state RCC bridge design. The range of a two-path bridge is changed to recreate IRC class AA followed stacking in VB6.0. Bridge very underlying components are parametrically concentrated on in this review. The work centers around longitudinal brace practical profundity for fluctuated ranges. T-Bar Bridge design can profit from nomograms.

L.P.Huang (2017) The heap dispersion factor (LDF) is fundamental for assessing bridges. Hardly any creators have thought about bar cross over load conveyance coefficients when bridge augmentation and strengthening. To address this, a longitudinal and cross pillar extension strategy was proposed. A Limited component (FE) model recreated bridge enlarging support. Load conveyance factors for all supports were assessed for changing cross bar position, amount, firmness, expanded width, existing bridge solidness, and interfacing framework. The outcomes show that bridge strengthening decreases side shaft LDF the most, further developing support load-conveying. Subsequent to strengthening, the support LDF rises 30%. Therefore, these jobs need strengthening. Cross shaft amount, position, and size meaningfully affect brace LDF. At the point when the expanded supports are unbendingly appended to the old braces, bar LDF is lower than

that pivot. The LDF of every support is comparative when the primary pillars are joined to expanded inflexible or pivoted braces. Bridge extending and supporting design can profit from this review.

3. OBJECTIVE OF THE STUDY

- To validate FEM analysis and compare it to conventional methods for lengths.
- To Evaluate maximum bending moment and comparison parameters when performing FEM analysis on ordinary girders and T-beam configurations.

4. METHODOLOGY

We started our study by fixing the deck slab thickness. Various deck slab thicknesses were analyzed. The slab received a homogenous 41.42 kN/m^2 equivalent load. Based on this investigation, 215mm was chosen for design thickness. Following that, excel sheets were created to calculate conventional design findings. After verifying the data, we modeled and analyzed the structures using FEM. Thus, we performed FEM analysis on both configurations and recorded the findings.

The analysis problems had the following details

- i. The clear spans are 20m, 24m, and 28m,
- ii. while the roadway width is 7.5m.
- iii. meter beam spacing.
- iv. 4 m cross beam interval.
- v. Deck slab thickness: 215 mm
- vi. Concrete grade: M25
- vii. Clear cover-40 mm
- viii. Wearing course thickness: 75 mm

a. FEM Analysis

Grillage Similarity was utilized to depict the bridge as an organization of inflexibly coupled radiates with discrete hubs for FEM examination. This concentrate intently matches standard little range techniques. This technique strays from customary design for ranges past 60 m.

5. RESULTS AND DISCUSSIONS

All investigations utilized STAAD Ace. V8i SS6 with loads from Indian Standard codes, and Courbon's methodology was utilized for class AA wheeled vehicle stacking. Each investigation began with succeed sheets and manual calculations for approval.

a. FEM Analysis versus. Conventional Method

The outer girder bending moment values from conventional design (excel sheets) and FEM analysis on ordinary deck slab supported on girders were compared.

Table 1: Maximum Bending moment

Span (m)	Conventional Method	FEM Analysis	Percentage Variation (%)
20	1850	1303	30
24	2240	1776	20
28	2630	2320	11.80

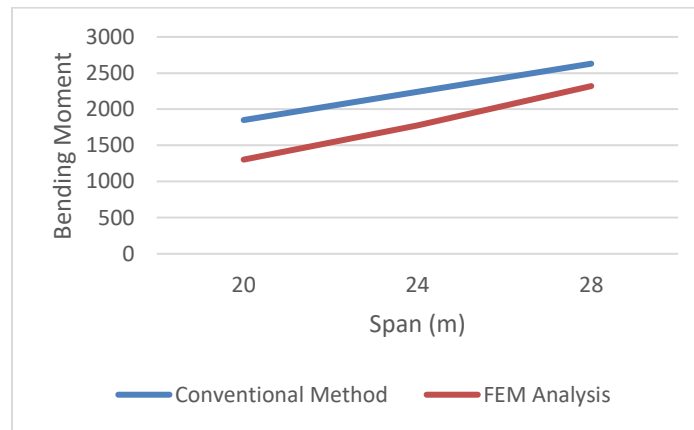


Figure 1: Graphical representation of Maximum Bending moment

b. Comparison of Girder-supported Ordinary Deck Slab and T-beam Deck Slab Configuration

• **Maximum Bending Moment**

Maximum Bending Moments in longitudinal girders of regular deck slab configuration are used to compare with T-beam deck slab structure.

Table 2: Maximum Bending Moment

Span (m)	Ordinary Deck Slab	T – beam Deck Slab	Percentage Variation (%)
20	3764	1635	56
24	7136	2173	70
28	12320	2920	76

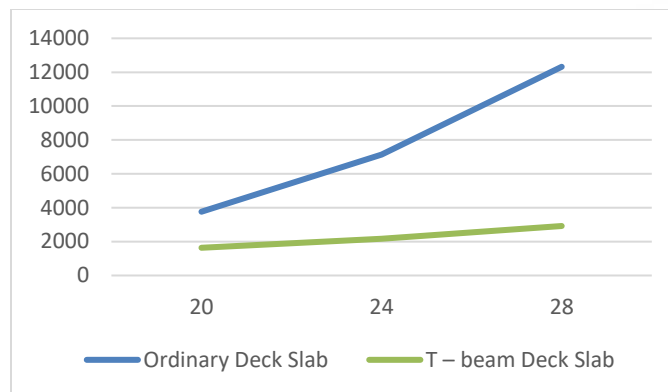


Figure 2: Graphical representation of Maximum Bending Moment

Comparing the regular deck slab configuration to the T-beam layout, maximum Bending Moment values vary from 50% to 76%.

T-beam deck chunk configuration has a tiny expansion in greatest Bowing Moment with length contrasted with customary configuration. Because of absence of outlining. Thus, joint stress concentrations are low because of the monolithic deck section and support structure, decreasing Bowing Moments.

- **Maximum Shear Force**

The sort of reinforcing and pre-stress needed to keep the bridge in service depend on shear forces. Thus, Shear Force fluctuation was noticed and investigated to determine the optimal arrangement.

Table 3: Maximum Shear Force

Span (m)	Ordinary Deck Slab	T – beam Deck Slab	Percentage Variation (%)
20	370	328	11
24	400	380	6
28	445	430	3

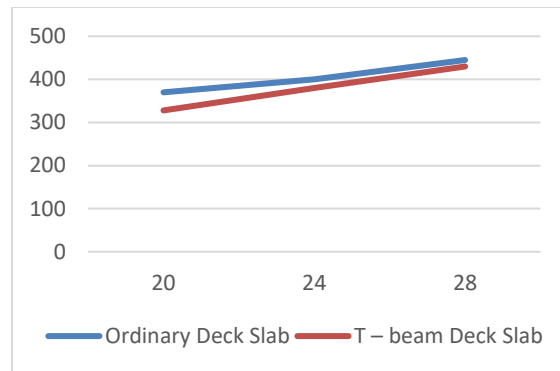


Figure 3: Graphical representation of Maximum Shear Force

When contrasted with T-beam arrangement, typical deck chunk configuration has higher shear force per meter run that diminishes with length and shifts from 3% to 11%. The graph reveals no significant shear force difference across configurations. Both systems have a comparable load transmission mechanism, therefore shear forces across surfaces vary within a tolerable range.

- **Deflection**

Since deflection is a key serviceability metric, both ordinary and T-Beam deck slab configurations were observed to see how span length affected deflection.

Table 4: Maximum deflection moment

Span (m)	Ordinary Deck Slab	T – beam Deck Slab
20	0.680	7.5
24	0.800	15.7
28	0.990	32.5

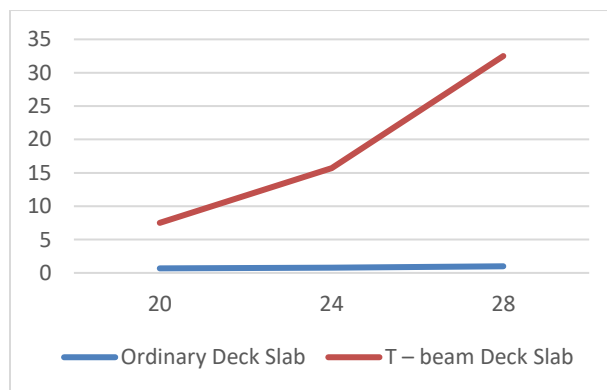


Figure 4: Graphical representation of Maximum Deflection moment

The configurations differ in deflection by 91% to 97%. The shortfall of cross braces, which operate as shear stress scattering components in standard deck piece configurations, makes T-Beam deck chunk deflection develop dramatically with length. However, T-beam deflection values fall within IRC serviceability restrictions of 45mm in RCC bridge design. A 50mm limit is confirmed by American Standards utilized by Iowa Department of Transportation.

6. CONCLUSION

Compared to deck slab architecture, T-beam configuration allows us to keep most design parameters within serviceability, deflection, and shear constraints. Joints and cross girders that increase bridge loadings are eliminated. Pre/post tensioning the T-beam deck slab improves performance. Applying pre-stressing force and calculating jacking force are easier. If prestressing is considered in the design/construction process, we must create a composite design. Due to its more exposed components, the standard deck slab configuration causes long-term maintenance and serviceability difficulties. The T-Beam deck slab arrangement makes this problem easier to solve.

REFERENCES

1. Amit Saxena ,Dr. Savita Maru“Comparative study of the analysis and design of T-Beam girders and box girder superstructure”IJREAT International Journal of Research in Engineering & Advanced Technology, April-May,2013
2. Chen Stuart S., Li Jun-Wei and TangiralaVamsi-Krishna, 2006, “Accelerating the design and delivery of bridges with 3D bridge information modeling: pilot study of 3D-centric modeling processes for integrated design and construction of highway bridges”; Transportation Research Board of the national academies, Final report for highway IDEA project 108.
3. Chen Wai-Fah and DuanLian, 2000, “Bridge Engineering HandBook”; Library of Congress Cataloging-inpublication Data, by CRC press LLC, ISBN: 0-8493-7434-0.
4. Don Peters, 2009, “Bridge Information Modelling To Cover A Complete Set Of Processes”; CE&CR, Asia Bently Systems, pp 84-86
5. Hemlatha A , Ashwin K. N , Dattatreya J.K , S.V.Dinesh“Analysis of RC bridge decks for selected national and international standards loading using finite element method” International Journal of Research in Engineering and Technology ,Nov-2015
6. L.P.Huang, S.G.Cao², C.L.Wei, Z.G.Chang, X.C.Zhang and Y.Z.Huang, “Load Distribution Factor before and after Widening of Existing T-beam Bridges”, Journal of Engineering Science and Technology Review 10 (3) (2017)

7. Praful N.K., Balasao Hanumant “Comparative Analysis of T-Beam Bridge by Rational Method And Staad Pro” *International Journal of Scientific & Engineering Research*, June-2015
8. R. Sreedhar, Spurti Mamadapur “Analysis of T-Beam Bridge using fem” *International Journal of Engineering and Innovative Technology (IJEIT)*, Sep-2012

Author’s Declaration

I as an author of the above research paper/article, hereby, declare that the content of this paper is prepared by me and if any person having copyright issue or patent or anything otherwise related to the content, I shall always be legally responsible for any issue. For the reason of invisibility of my research paper on the website/amendments/updates, I have resubmitted my paper for publication on the same date. If any data or information given by me is not correct, I shall always be legally responsible. With my whole responsibility legally and formally have intimated the publisher (Publisher) that my paper has been checked by my guide (if any) or expert to make it sure that paper is technically right and there in no unaccepted plagiarism and hentracantane is genuinely mine. If any issue arises related to Plagiarism/ Guide Name/ Educational Qualification/ Designation/ Address of my university/college/institution/ Structure or Formatting/ Resubmission /Submission /Copyright /Patent/Submission for any higher degree or Job/Primary Data/Secondary Data Issues. I will be solely/entirely responsible for any legal issues. I have been informed that the most of the data from the website is invisible or shuffled or vanished from the database due to some technical fault or hacking and therefore the process of resubmission is there for the scholars/students who finds trouble in getting their paper on the website. At the time of resubmission of my paper I take all the legal and formal responsibilities, If I hide or do not submit the copy of my original documents (Andhra/Driving License/Any Identity Proof and Photo) in spite of demand from the publisher then my paper maybe rejected or removed from the website anytime and may not be consider for verification. I accept the fact that as the content of this paper and the resubmission legal responsibilities and reasons are only mine then the Publisher (Airo International Journal/Airo National Research Journal) is never responsible. I also declare that if publisher finds Any complication or error or anything hidden or implemented otherwise, my paper maybe removed from the website or the watermark of remark/actuality maybe mentioned on my paper. Even if anything is found illegal publisher may also take legal action against me

RUDRADEEP DAS

Dr. ALOK GOYAL
